





Always read through this manual before operation!

Read through this manual before shooting, paying special attention to safe operation!


Failing to do so may cause injury, accidents, or damage to the gun!



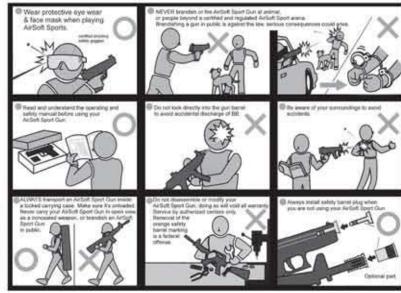

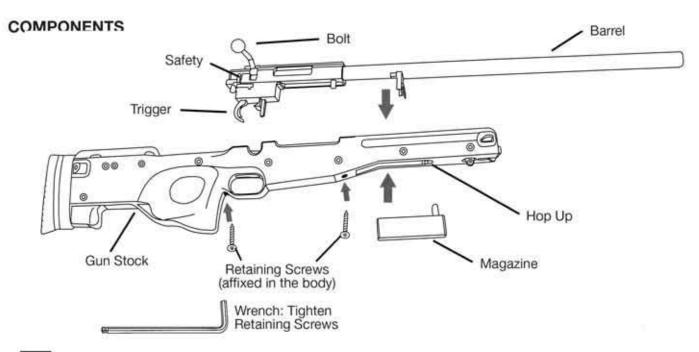

SAFETY SETTING (Always set the safety lever to safe position before firing)




When the safety lever is set to the "On" position, the trigger will not move. Please do not pull the trigger, otherwise you may damage the gun.


When the safety lever is set to the "Off" position, it is ready for shooting.

The gun will fire when the trigger is pulled.

2 LOADING BB'S INTO AND SETTING THE MAGAZINE



Remove the magazine by pressing the magazine release and pulling the magazine out.

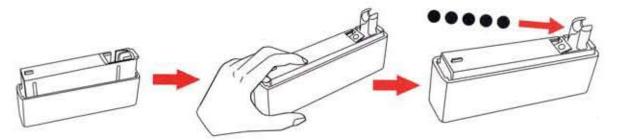

Press the Magazine and load the BB's, maximum of 30 BB's. Do not overload the Magazine. Reinsert the Magazine into the gun, until a "Click" is heard.

3 OPERATION


 Rotate the Bolt up, then pull the Bolt all the way back until a "Click" is heard.


Then, push the Bolt all the way forward and rotate down.

Make sure the Safety release is in "Off" position. The gun is now ready for firing.

Pull Trigger.


Replace Safety release to "On" position when gun is not in use.



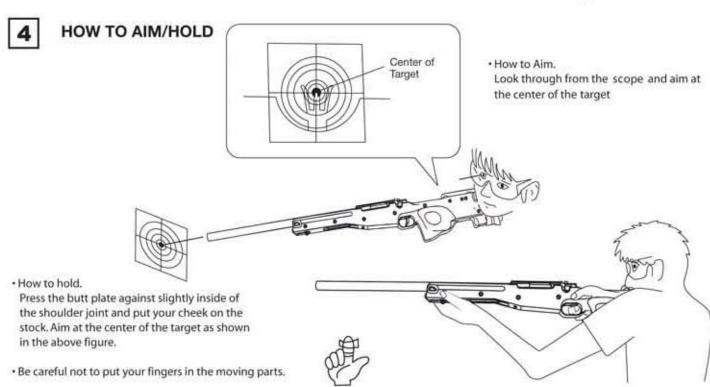


5 HOP UP

Adjust Hop Up by using M2.5 wrench. The best position is where the BB flies hortizontally, and the longest distance is obtained.




6 MAINTENANCE

- Maintenance when bullet speed becomes low
- 1. Apply Oil as shown below, using the cleaning road and oiled cotton cloth. Insert cleaning rod into barrel.
- 2. After completing cleaning, use the cleaning rod (with cotton) as shown below to Remove excess oil.

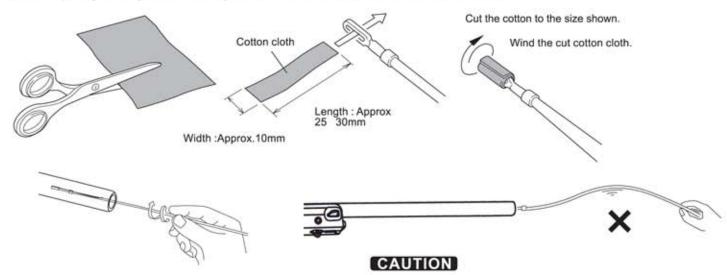


Hold at the leading end of the rod and insert the rod into the barrel while turning the rod.

- Always turn the hop up lever completely down before inserting Cleaning Rod.
- · It is difficult to insert the rod if you hold the rod at the end.
- Removing Clogged Bullets (Set the Safety button to ON and remove the magazine beforehand.)
- 1. Remove the Magazine
- 2. Turn the hop up dial completely down and insert the Cleaning Rod from the lead edge of the barrel.



Be careful so that the angled part of the Cleaning Rod faces down, and remove clogged bullets



Make sure to clean the barrel chamber whenever bullets are removed.

- When bullets are clogged, immediately stop operation, Remove clogged bullets and then restart operation of the air gun.
 (If operation is continued with bullets being clogged, the mechanism may be damaged.)
- Be careful during maintenance, as the inside chamber is precisely designed and can be damaged easily.
 Use of a hard brush may damage the hop chamber packing.



